


## Origins 132 Badewannen-Aufsatzarmatur

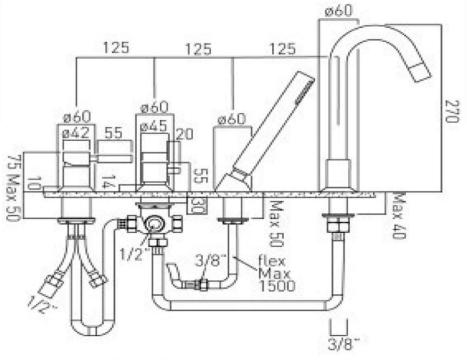

description: 4 hole bath shower mixer

single lever

spout can swivel or be fixed

deck mounted

with water flow straightener with water flow aerator ceramic cartridge CAR-K40A

2 x 1/2" nut x 500mm flexipipe connections 2 x 3/4" x 3/4" nut x 600mm flexipipe connections 1 x 1/2" x 3/8" male shower hose 2000mm handset deck mount drill hole diameter 35mm spout deck mount drill hole diameter 28mm valve deck mount drill hole diameter 40mm diverter deck mount drill hole diameter 46mm


finishes: chrome

recommended flow regulator product code: FR-SHOWER/9-C/P

guarantee: 12 year guarantee

minimum operating pressure: 3.0 bar HP

flow rate at 3.0 bar flow pressure: Bath: 13, Shower: 13 I/min



'mixed measurements' refers to equal hot and cold water supply flow rate for unregulated flow unless flow regulator fitted as standard

certificates and awards:



cert no. 1609031

www.baedermax.com